
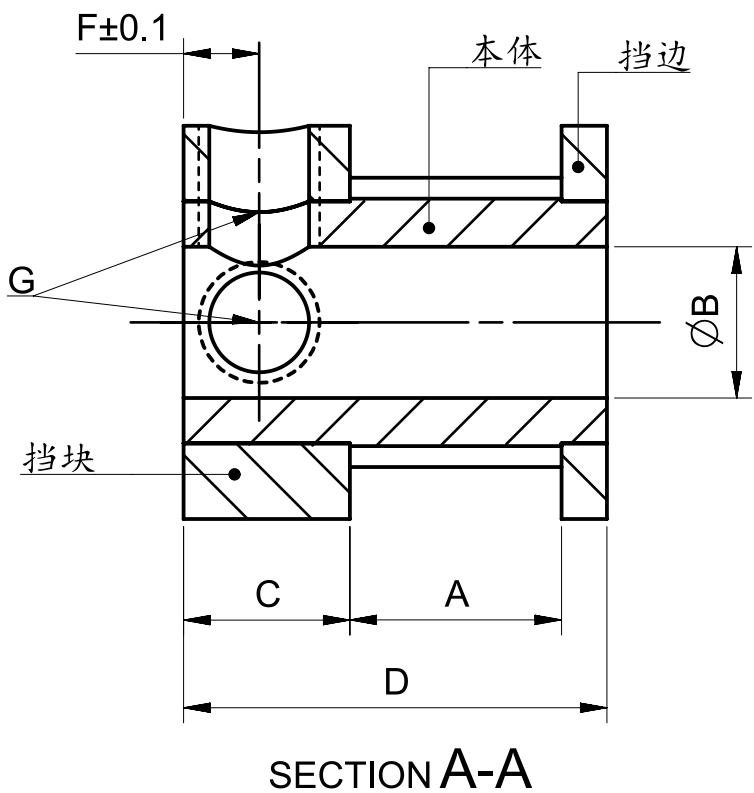
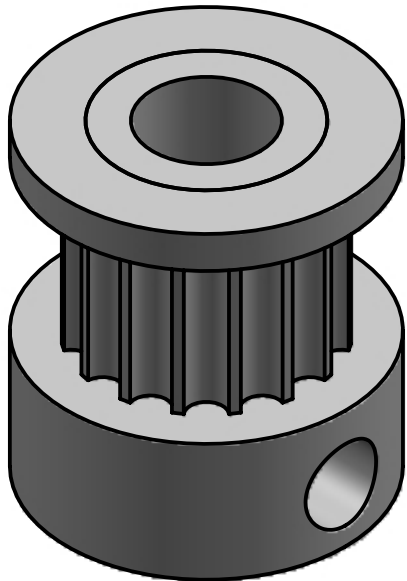


技术要求：

1. 表面无明显刮痕、无毛刺、锐边倒钝
2. 本体与挡边，挡块为过盈配合，结合力不低于4.4N

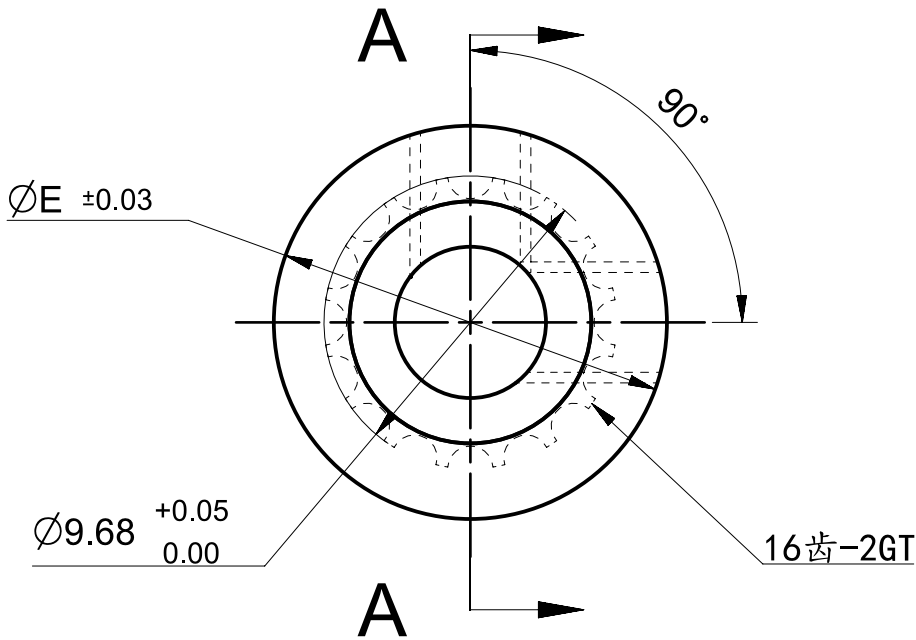

SECTION A-A

			PCN	A	B	C	D	E	F	G										
			A074-03	7.00	5.000~5.012	7.00	15.5	13.90	3.50	M4X0.7										
材料	根据订单要求	比例	4:1	单位	mm	未注尺寸公差: X±0.2 X.X±0.1 X.XX±0.05 角度±1° 未注形位公差: <table><tr><td>—</td><td>0.05</td></tr><tr><td>◎</td><td>0.05</td></tr><tr><td>⊥</td><td>0.05</td></tr><tr><td>○</td><td>0.05</td></tr><tr><td>↗</td><td>0.05</td></tr></table> 关键尺寸  (功能尺寸, CPK要求) 主要尺寸  (检验要求) 第一视角 		—	0.05	◎	0.05	⊥	0.05	○	0.05	↗	0.05	锐力斯 江苏锐力斯三维科技有限公司 图号: A074		
—	0.05																			
◎	0.05																			
⊥	0.05																			
○	0.05																			
↗	0.05																			
版本	处数	变更描述		签名	日期	<table><tr><td>版本</td><td>A0</td><td>第 1 页</td></tr><tr><td>图幅</td><td>A3</td><td>共 1 页</td></tr></table>			版本	A0	第 1 页	图幅	A3	共 1 页						
版本	A0	第 1 页																		
图幅	A3	共 1 页																		
设计	徐立	20210519	审核																	
校对			批准																	
工艺																				