
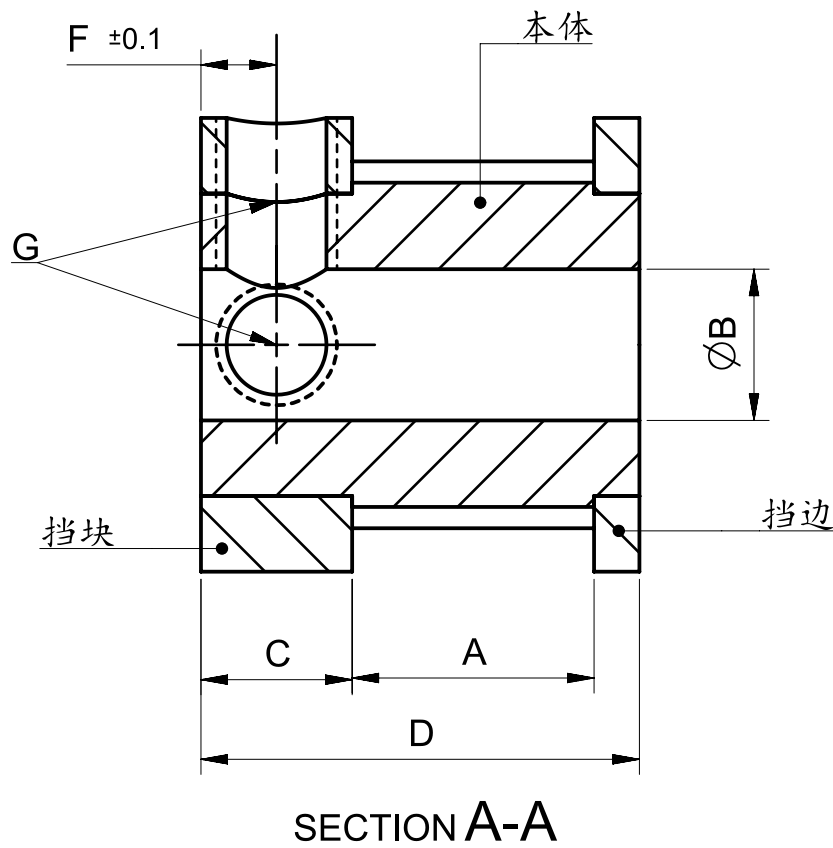
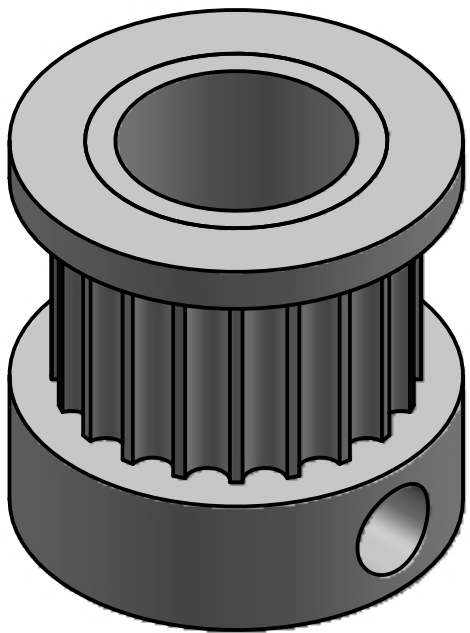
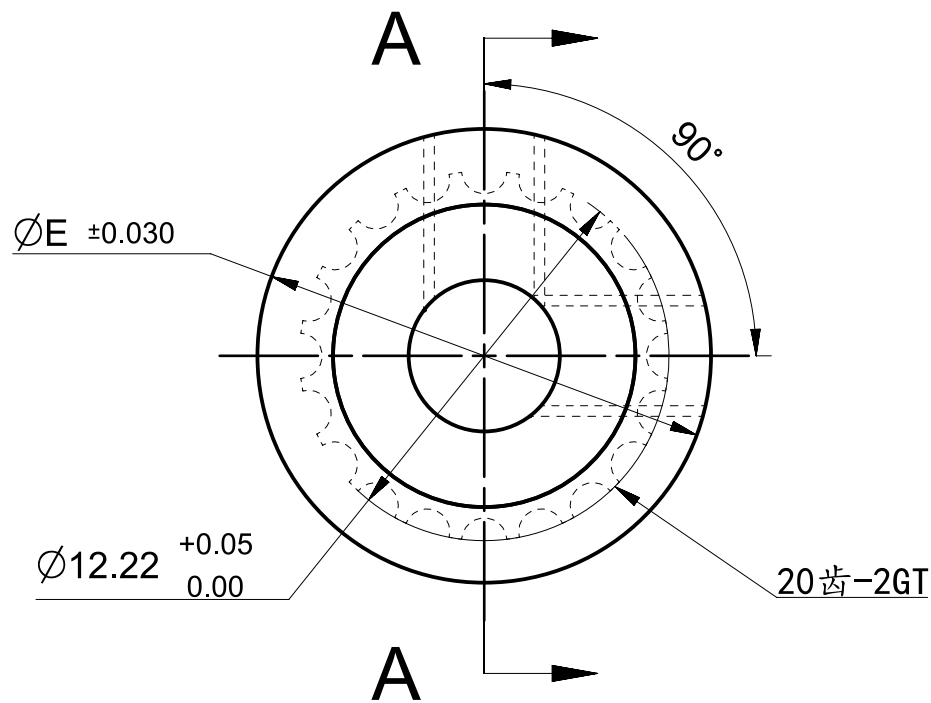




技术要求：

- 表面无明显刮痕、无毛刺、锐边倒钝
- 本体与挡边，挡块为过盈配合，结合力不低于44N

PCN	A	B	C	D	E	F	G
A073-02	7.00	5.000~5.012	7.50	16.0	15.00	3.75	M4×0.7-6H
A073-04	11.00	5.000~5.012	7.50	20.0	15.00	3.75	M4×0.7-6H

材料		根据订单要求		比例	4:1		单位	mm		未注尺寸公差: X=0.2 X.X=0.1 X.XX=0.05 角度±1° 未注形位公差: <table><tr><td>—</td><td>0.05</td></tr><tr><td>◎</td><td>0.05</td></tr><tr><td>⊥</td><td>0.05</td></tr><tr><td>○</td><td>0.05</td></tr><tr><td>↗</td><td>0.05</td></tr></table>	—	0.05	◎	0.05	⊥	0.05	○	0.05	↗	0.05	关键尺寸  (功能尺寸, CPK要求)		 江苏锐力斯三维科技有限公司 图号: A073 <table><tr><td>版本</td><td>A0</td><td>第 1 页</td></tr><tr><td>图幅</td><td>A3</td><td>共 2 页</td></tr></table>				版本	A0	第 1 页	图幅	A3	共 2 页
—	0.05																															
◎	0.05																															
⊥	0.05																															
○	0.05																															
↗	0.05																															
版本	A0	第 1 页																														
图幅	A3	共 2 页																														
版本	处数	变更描述		签名	日期	主要尺寸  (检验要求)																										
设计	揭海洋	20210419	审核			第一视角 																										
校对				批准																												
工艺																																